




TUERCAS REMACHABLES CILINDRICAS INOX A2 CIEGAS


FIXOR^{SL}

Calle del Dr. Mata num 5, 08203 Sabadell
Tel 93 710 41 60, tecnica@fixor.es
www.fixor.es

CODICE CODE		GRIP		d +0,07 -0,1	D +/- 0,3	L +/- 0,3	K +/- 0,15	I ~	
			+0,1 -0						Nm
04TPBFRXFI-L	M4	0,5 - 2	6,0	5,9	9,0	16,0	0,8	11,3	5
05TPBFRXFI-L	M5	0,5 - 2,5	7,0	6,9	10,0	19,0	1,0	13,8	8,5
06TPBFRXFI-L	M6	0,5 - 3,0	9,0	8,9	12,3	21,0	1,3	15	15
08TPBFRXFI-L	M8	1 - 3,5	11,0	10,9	15,0	25	1,5	18,2	26
10TPBFRXFI-L	M10	1 - 4	13,0	12,9	17,0	27	1,7	19,4	50

TPBX-L CABEZA PLANA (CON VALONA)

INOX A2, LISAS CIEGAS.

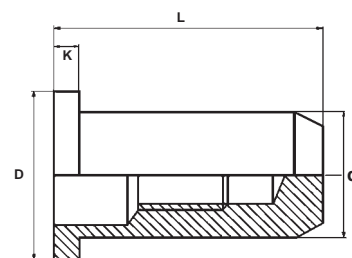

SB4AFRXFI-L	M4	0,5 - 2	6,0	5,9	7,0	15	0,5	11	3
SB5AFRXFI-L	M5	0,5 - 2	7,0	6,9	8,0	16,5	0,5	12,5	6
SB6AFRXFI-L	M6	0,5 - 2,5	9,0	8,9	10,0	20,5	0,6	15,5	11
SB8BFRXFI-L	M8	1 - 3	11,0	10,9	12,0	23	0,6	17,6	20
SB10AFRXFI-L	M10	1,0 - 3,5	13,0	12,9	14	24,5	0,7	18,3	32

SBX-L CABEZA REDUCIDA (SIN VALONA)

INOX A2, LISAS, CIEGAS

