





TUERCAS REMACHABLES CILINDRICAS CIEGAS LISAS




INOX A2

CODIGO		GRIP	D +/-0,3	 +0,1/-0	T +0,1/-0	K +/-0,15	L +/-0,3	I ~	 Nm
04TPBFRXFI-L	M4	0,5 - 2,0	5,9	6,0	9,0	0,8	16	11,3	5
05TPBFRXFI-L	M5	0,5 - 2,5	6,9	7,0	10,0	1,0	17	13,8	8,5
06TPBFRXFI-L	M6	0,5 - 3,0	8,9	9,0	12,3	1,3	21	15	15
08TPBFRXFI-L	M8	1,0 - 3,5	10,9	11,0	15,0	1,5	25	18,2	26
10TPBFRXFI-L	M10	1,0 - 4,0	12,9	13,0	17,0	1,7	27	19,4	50

TPBX-L

CABEZA PLANA

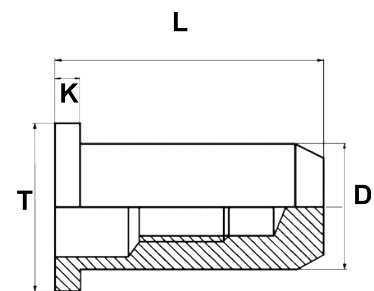

CODIGO		GRIP	D +/-0,3	 +0,1/-0	T +0,1/-0	K +/-0,15	L +/-0,3	I ~	 Nm
SB4AFRXFI-L	M4	0,5 - 2,0	5,9	6,0	7,0	0,5	15	11	3
SB5AFRXFI-L	M5	0,5 - 2,0	6,9	7,0	8,0	0,5	16,5	12,5	6
SB6AFRXFI-L	M6	0,5 - 2,5	8,9	9,0	10,0	0,6	20,5	15,5	11
SB8BFRXFI-L	M8	1,0 - 3,0	10,9	11,0	12,0	0,6	23	17,6	20
SB10AFRXFI-L	M10	1,0 - 3,5	12,9	13,0	14,0	0,7	24,5	18,3	32

SBX-L

CABEZA REDUCIDA

