




## TUERCAS REMACHABLES CILINDRICAS ESTRIADAS

# INOX A2


CODIGO		S	D		T	K	L	I	
			+0,07/-0,1	+0,1/-0	+/-0,3	+/-0,15	+/-0,3	~	Nm
03TP15FRXFI 03TP_30FRXFI	M3	0,5 - 1,5 1,5 - 3,0	4,9	5	7 8	0,8 0,75	10 10	5 5,5	2
04TP20FRXFI 04TP_40FRXFI	M4	0,5 - 2,0 2,5 - 4,0	5,9	6	9	0,8 0,75	10,5 12,5	6,5	5
05TP25FRXFI 05TP_40FRXFI	M5	0,5 - 2,5 2,0 - 4,0	6,9	7	10	1	13 16	8	8,5
06TP30FRXFI 06TP_55FRXFI	M6	0,5 - 3,0 3,5 - 6,0	8,9	9	12,3 13	1,3 1,5	15,5 19	9,2 9	15
08TP30FRXFI 08TP_60FRXFI	M8	1,0 - 3,5 3,0 - 6,0	10,9	11	14,5 14,5	1,5 1,5	18,5 21	11,5 11,5	26
85IXITGM10C12 85IXITGM10L12	M10	0,8 - 3,5	11,9	12	16	1,7	19	10,5	50
10TP30FRXFI		3,5 - 6,0	11,9	12	16	1,7	22	10,5	
10TP_60FRXFI		1,0 - 4,0 3,0 - 6,0	12,9 12,9	13 13	17 19	1,6 2	21 26	13,5 14,5	
12TP40FRXFI 12TP_60FRXFI	M12	1,0 - 4,0 3,5 - 7,0	15,9	16	23	2 1,6	25 29	16,5	80

S3AFRXFI S3AFR_LXFI	M3	0,5 - 2,0 1,5 - 2,5	4,9	5	6 5,8	0,4 0,5	9 10	5,5	1
S4AFRXFI S4AFR_LXFI	M4	0,5 - 2,0 2,5 - 4,0	5,9	6	7 7	0,5 0,5	10,5 12,5	6,5	3
S5AFRXFI S5AFR_LXFI	M5	0,5 - 2,0 2,5 - 4,5	6,9	7	8	0,5	11,5 13	7,2 6,8	6
S6AFRXFI S6AFR_LXFI	M6	0,5 - 3,0 3,0 - 6,0	8,9	9	10	0,6 0,5	14 17,5	9 8,6	11
S8BFRXFI S8BFR_LXFI	M8	1,0 - 3,5 3,5 - 6,0	10,9	11	12	0,5 0,65	16,5 19,5	10,5 10	20
85IXITRGM10C12 85IXITRGM10L12	M10	0,8 - 3,0	11,9	12	13,5	0,8	18	11,2	32
S10AFRXFI		2,0 - 4,5	11,9	12	13,5	0,8	19,5	11,2	
S10AFR_LXFI		1,0 - 3,5 3,0 - 6,0	12,9 12,9	13 13	14 14	0,7 0,5	17,7 23	10,7 13,3	
S12AFRXFI16	M12	1,0 - 4,0	15,9	16	17,6	0,75	24,2	14	50

03TFFRXFI 03TFFR_LXFI	M3	1,7 - 3,0 3,0 - 4,0	4,9	5	8	1,5	11,5 12,5	11,5	1
04TFFRXFI 04TFFR_LXFI	M4	1,5 - 3,0 3,5 - 5,0	5,9	6	9	1,5	12 13	7,5	4
05TFFRXFI 05TFFR_LXFI	M5	1,5 - 3,5 4,0 - 6,0	6,9	7	10	1,5	13 15	7	8
06TFFRXFI 06TFFR_LXFI	M6	1,5 - 4,0 4,5 - 6,5	8,9	9	12	1,5	15,5 19	9	15
08TFFRXFI 08TFFR_LXFI	M8	2,0 - 4,5 3,5 - 6,5	10,9	11	14 13,7	1,5	18,5 21	12	26
85IXITSGM10C12 85IXITSGM10L12	M10	1,5 - 4,0	11,9	12	15	1,5	18	10,5	45
10TFFRXFI		3,0 - 6,0	11,9	12	15	1,5	20	10,5	
10TFFR_LXFI		2,0 - 5,0 3,5 - 6,5	12,9 12,9	13 13	16 15,7	1,5 1,6	21 25	13 14,5	
12TFFRXFI16	M12	1,5 - 4,5	15,9	16	19	1,7	24	14	50


## TPX

CABEZA PLANA

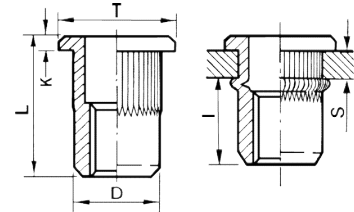

## SX

CABEZA REDUCIDA

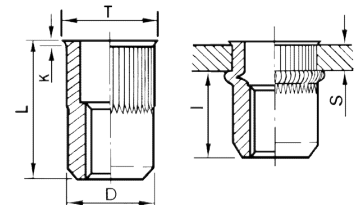

## TFX

CABEZA AVELLANADA

